




Composition KIT BH30/805

Code	Description	QTY
BH30/803	Electromechanical BRUSHLESS motor, low voltage, super intensive use, with native encoder onboard, irreversible ideal for sliding gates up to 800-1000 kg. with built-in digital controller B70 series, mechanical limit switch.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70, EDGE and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F4ES	Pair of external photocells synchronized 24V AC/DC (max. 4 pairs).	1
FIFTHY/24	LED flashing light series FIFTHY 24V with integrated antenna.	1
R99/C/001	Signboard "Automatic Opening"	1


Product technical specifications	KIT BH30/805
Max gate weight	800-1000 kg
Power line supply	230V AC - 50Hz
Motor power supply	24V
Power rating	200W
Frequency of use	Intensive use
Thrust	50 - 1000N
Operating temperature	-20+55°C
Protection level	IP43
Reductor Type	Irreversible
Manoeuvre speed	12 m/min (0.20 m/s)
Limit switch	Mechanical limit switch
Onboard control unit	B70/1DC
Encoder	Digital native encoder + magnetic digital SENSORED, 4096 PPR
Batteries recovery	Optional 2 internal battery 12V 1,2AH - Optional 2 external battery 12V 4,5AH
Type exit gear	Z15/mod 4
Operating cycles per day (opening/closing - 24 hours no stop)	1300
Maximum dimension product in mm (L x W x H)	315 x 165,8 x 329
Product weight packed (Kg)	12,5

PRODUCT DIMENSIONS

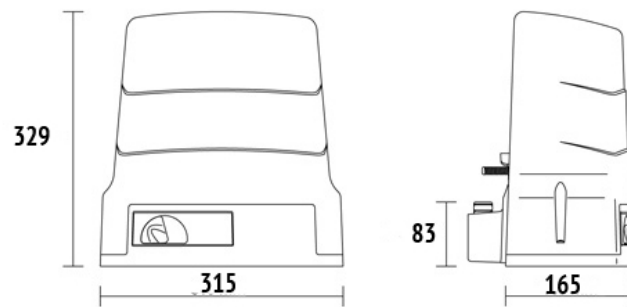


DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

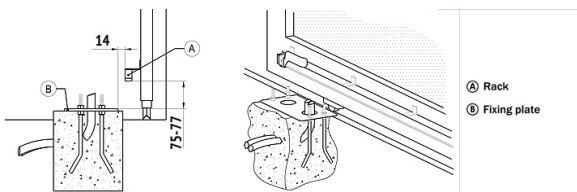


PREDISPOSITION FOR STANDARD INSTALLATION

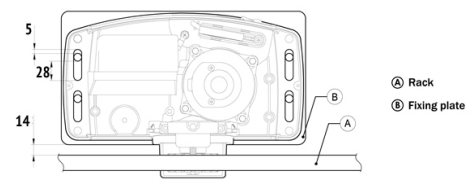

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



KT214
Fixing plate with stay bolts and screws H30 series.



KT214/SC
Adapter plate with stay bolts and screws H30 series.



KT221
Raised fixing plate for H30 series (+3,5 cm).



HT418
External box without batteries, for battery BT12V45 (12V DC 4,5 Ah)



GA550
Galvanised steel rack 22x22x1000 module 4.



GA551
Galvanised steel rack 30x12x1000 module 4 with spacers and screws.



GA553
Nylon rack module 4 with 6 connectors L.1000.



GA554
Pocket of 6 spacers (2,5 Cm) and screws.



MC773
Kit mechanical limit switch for control unit H70/103AC, H70/104AC, B70/1DC, B70/1DCHP.



R99/C/001
Signboard Automatic Opening".